

## A18 R 90

### Standard equipment



- 2 x 5.511.1845  
PPL brush Ø 457 mm - 18"



- 4.508.1196  
Front squeegee blade L.1027 mm  
Shore 40 Th. 3 mm
- 4.508.1195  
Rear squeegee blade L.1150 mm  
Shore 33 Th. 4 mm



## A18 R 90

- Suitable for maintenance and deep cleaning of medium and large areas (up to 4.500 m<sup>2</sup>) with a considerable reduction of cleaning costs
- More than 60/80 kg of constant pressure on the brushes
- Large load tank capacity, resulting in reduced number of stops and maximum use of battery charge for effective operation of the machine
- Compact size
- Stability even when fully loaded
- Front independent wheel-drive with tight steering radius
- Easy access to electrical components
- Automatic brush plate lifting system
- Automatic squeegee lifting system
- Automatic squeegee lifting while reverse going
- Automatic device that stops brushes and detergent water outflow when the machine is stationary
- Antifoam device
- Self-levelling brushes
- High-performance batteries resulting in high-working efficiency.

### Technical data:

### A18 R 90

Code	8.575.0011
power supply	24 V
scrubbing width	900 mm
squeegee width	1000 mm
max working capacity	6200 m <sup>2</sup> /h
detergent tank capacity	140 l
recovery tank capacity	150/180 l
traction	front motorwheel/900W
vacuum motor	550W
brush motor	1250W

# Ride-on floor scrubber driers




Quick lock recovery tank cap allows for fast and easy cleaning and sanitization of the tank; the tilting tank together with a large size drain hose allow the complete emptying of the tank and the removal of any type of solid dirt. The antifoam device protects suction motor, as well as the

electronic floating switch that stops suction when the tank is full. Comfortable steering wheel. User friendly control panel, provided with hour meter, speed adjustment knob and detergent solution low level warning light. All motors are protected by



thermal breakers. 80 kg of continuous brush plate pressure with Self Leveling System to strongly and deeply removing any kind of dirt on any kind of floor. Strong oil-proof polyurethane wheels. 500 Ah C5 battery box allowing continuous working time

up to 5 hours. Built with strong components, A 18 have been designed to resist even to extreme stresses; the frame is made of steel profiles with a thickness varying from 5 to 12 mm, protected with a high resistance corrosion-proof paint.

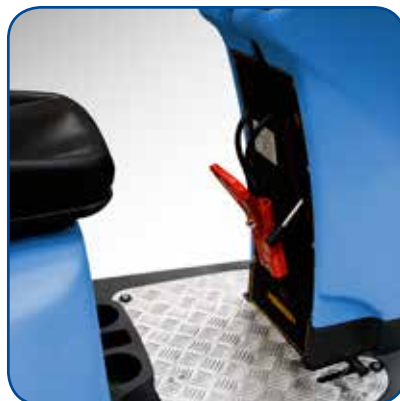

## Optional accessories:



- 0.107.0008  
Battery box Pb-acid  
24V 500Ah C5



- 0.108.0003  
Battery Charger 24/36V  
50/60A - 220-240/50-60



- 4.508.1251 Polyurethane front blade L.1027 TH. 3
- 4.508.1252 Polyurethane rear blade L.1150 TH. 4



- 5.511.1848  
Tynex brush Ø 457 mm-18"
- 5.511.1849  
PPL 0,03 brush Ø 457 mm-18"
- 5.511.1847  
PES brush Ø 457 mm-18"



- 5.511.1850  
EWU pad driver Ø 457 mm-18"



- 6.508.0150 - Ø 457 mm - 18"- beige (5 pcs.)
- 6.508.00151 - Ø 457 mm - 18"- green (5 pcs.)
- 6.508.0142 - Ø 457 mm - 18"- black (5 pcs.)